


Order No. R800 8002

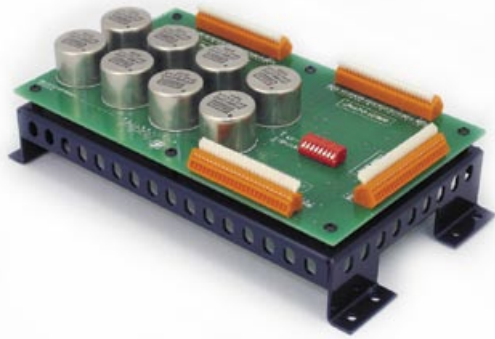

The Radial 8ox-ci is an 8 channel passive mic splitter that has been specifically designed for use in permanent installations. It features a choice of premium Jensen audio bridging transformers or custom Radial designed transformers in an effort to address different budget considerations.

German-made Wago connectors were selected to connect to-and-from the 8ox-ci as they feature easy to install spring tension wire-mounts that only require stripping and inserting for quick installation. The constant spring tension design assures a positive contact even under temperature fluctuations and cycling. The mil-spec PCB, connectors and transformers are mounted on a rugged 14 gauge steel frame that is easily screwed into place inside any steel enclosure or rack system. The innovated suspended frame design allows cable bundles to be tied down and passed underneath when confronted with tight spaces.

Connections are simple: There is a main input that connects from the microphones; a direct output for the front of house mixer and return 48V phantom feed; an auxiliary direct output with on-board ground lift switches for monitors or remote broadcast; and an isolated output for recording. This makes the Radial 8ox-ci the ideal mic splitter for venues such as concert halls, auditoriums, houses of worship and community centers where a discreet installation is required and optimum sound quality a necessity.

Features


- One input – three outputs for maximum flexibility
- Innovative frame design for permanent installations
- Easy and quick to install spring-loaded connectors
- Choice of Jensen or Radial audio transformers
- Completely passive – does not require any power

Applications

- Mic splitting for permanent venues
- Provide a clean, noise free signal for recording
- Install under stages, in racks or in electrical boxes
- Where premium audio signal transfer is required

Cool Factors

- Compact and super easy to install
- Transformer isolation eliminates hum & buzz
- Mount anywhere rack frame design
- May be short loaded for less channels
- No soldering or connectors required
- 3 year transferable warranty

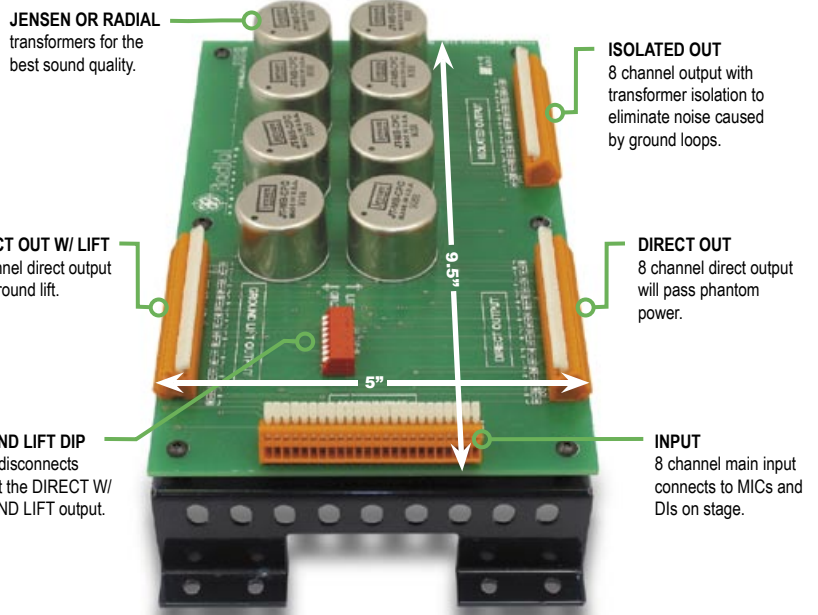

JUNCTION BOX FRIENDLY

9.5" wide x 5" deep x 3" high. Mounts in standard electrical junction boxes Six units will fit in a 24" x 24" JB for 48 channels. May be installed by electrician and wired by the audio contractor.

WAGO SOLDERLESS

connectors for 14 - 28awg cable helps reduce installation time.

MILITARY GRADE PCB

is bolted to frame and won't short-out or develop cold solder joints.

